


## HOMOLOGATION OF BRAKE SYSTEM


<i>Manufacturer</i>	Birel s.p.a.
<i>Make</i>	FREE LINE
<i>Model</i>	FL CX - I 24
<i>Category</i>	Formula Cadet
<i>Valid from</i>	01 January 2014
<i>Valid until</i>	31 December 2022
<i>Number of pages</i>	3

*This Homologation Form reproduces descriptions, illustrations and dimensions of the brake system at the moment of the MSA homologation. The Manufacturer may modify them, but only within the limits set by the MSA Regulations in force and with the written agreement of the MSA.*

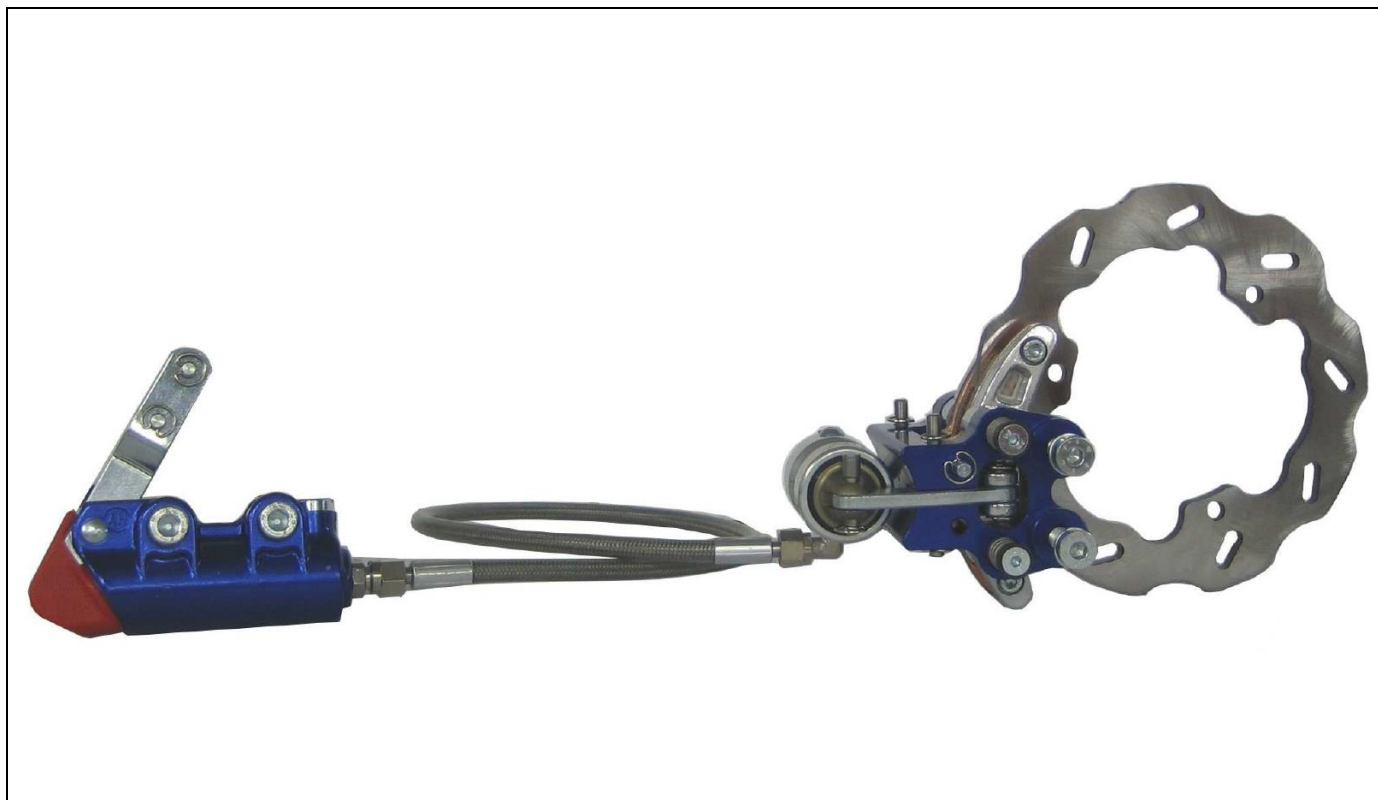


*Photograph of the complete brake system*


### SIGNATURE AND STAMP OF THE MSA

	<p>Date: <b>17 December 2013</b></p> <p>Signed by: <b>Joe Hickerton</b></p> <p>Position: <b>Technical Administrator</b></p>
---	---

## TECHNICAL INFORMATION

		<i>Measurement</i>	<i>Tolerance/Remark</i>
<b>A:</b>	Master Cylinder Bore	<b>19 mm</b>	-
<b>B:</b>	Number of callipers	<b>1</b>	-
<b>C:</b>	Number of calliper pistons	<b>1</b>	per caliper
<b>D:</b>	Calliper piston bore(s)	<b>24 mm</b>	-
<b>E:</b>	Number of pads	<b>2</b>	per caliper
<b>F:</b>	Calliper material	<b>Aluminium</b>	-
<b>G:</b>	Disc material	<b>Steel</b>	-
<b>H:</b>	Drilled and/or Grooved?	<b>Yes</b>	-
<b>I:</b>	Vented disc?	<b>No</b>	-
<b>J:</b>	Thickness of new disc	<b>5 mm</b>	±1 mm (2.5mm minimum)
<b>K:</b>	External diameter of disc	<b>150 mm</b>	±1.5 mm
<b>L:</b>	Internal diameter of disc	<b>109 mm</b>	Maximum
<b>M:</b>	Number of mounting lugs	<b>3</b>	-

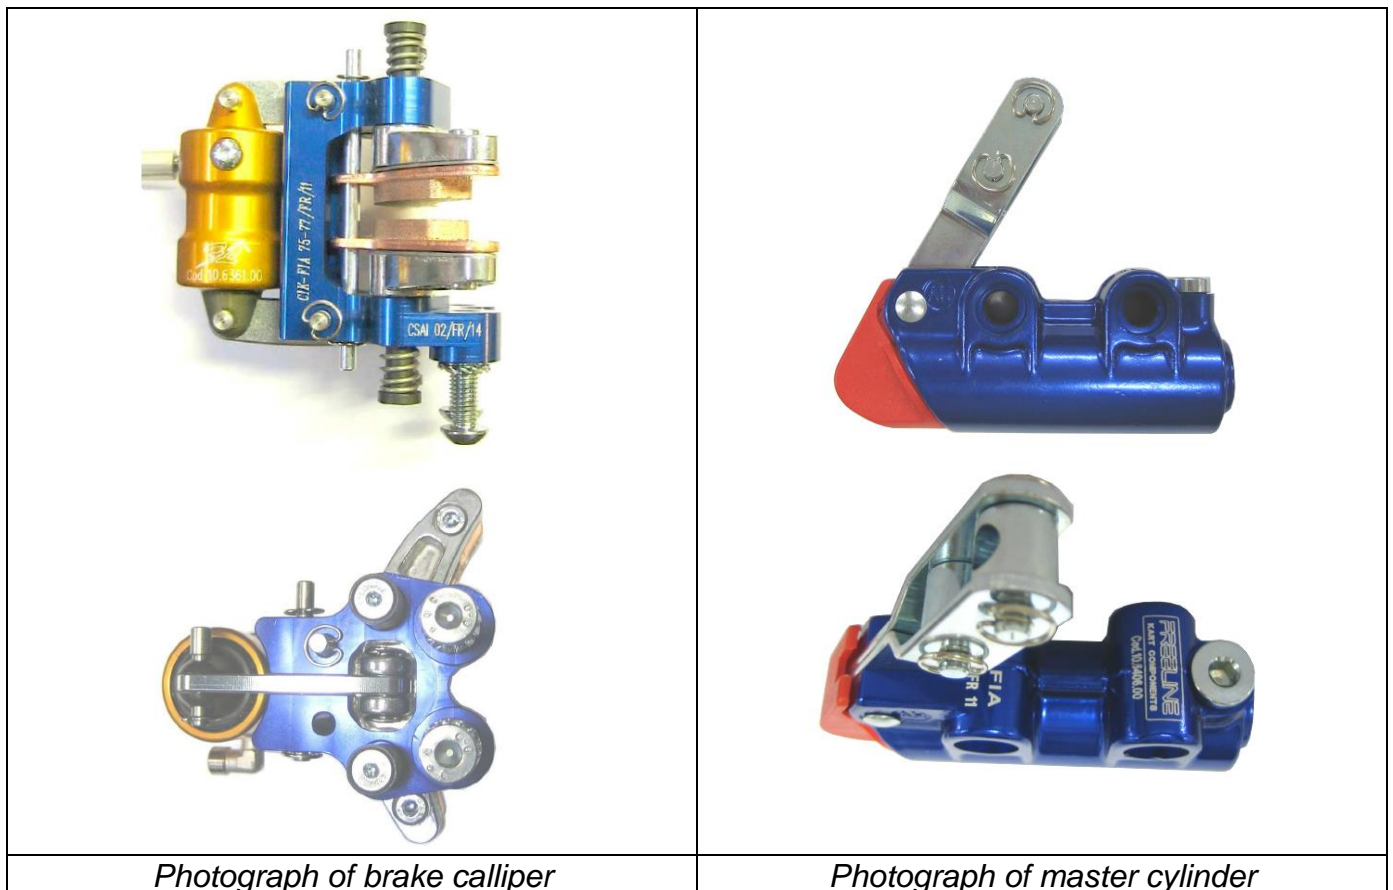

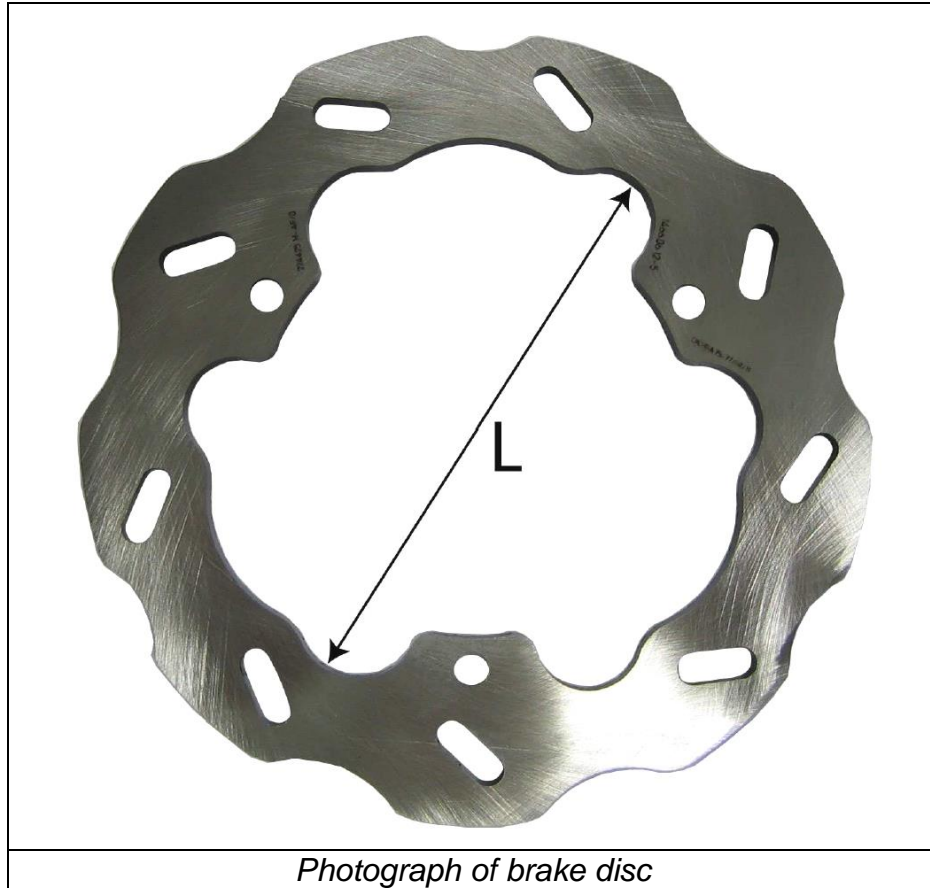

### COMPLIMENTARY INFORMATION

Empty rectangular box for complementary information.