


REGISTRATION OF CHASSIS & BRAKE


<i>Category</i>	BAMBINO
<i>Valid From</i>	08 May 2013
<i>Number of Pages</i>	7

This Homologation Form reproduces descriptions, illustrations and dimensions of the chassis at the moment of the MSA homologation. The Manufacturer may modify them, but only within the limits set by the MSA regulations in force and with the written agreement of the MSA.

SIGNATURE AND STAMP OF THE MSA	
	Date: 08 May 2013 Signed by: John Ryan Position: MSA Technical Executive



CHASSIS

<i>Manufacturer</i>	BIREL s.p.a
<i>Make</i>	RK Robert Kubica
<i>Model</i>	Baby

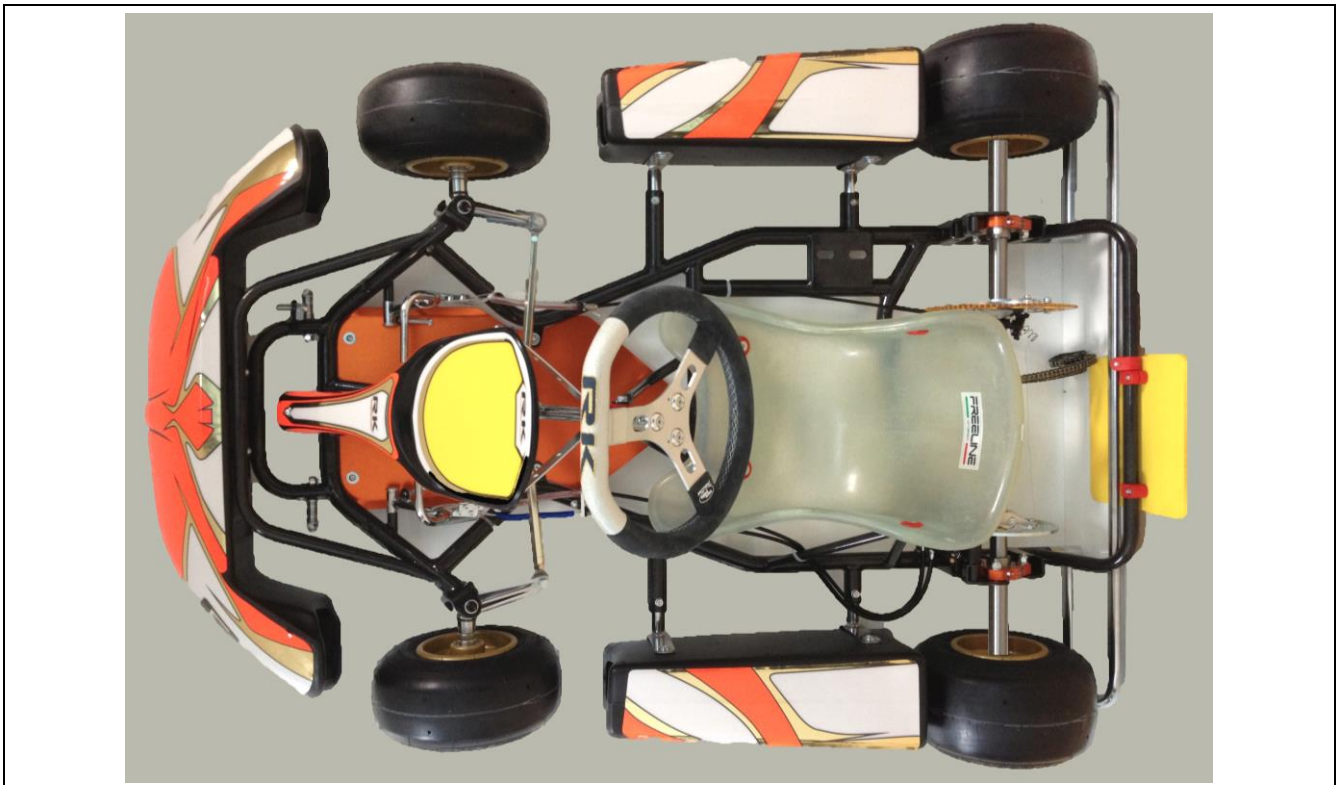

Photograph of complete kart less seat & tyres


TECHNICAL DRAWINGS OF FRAME

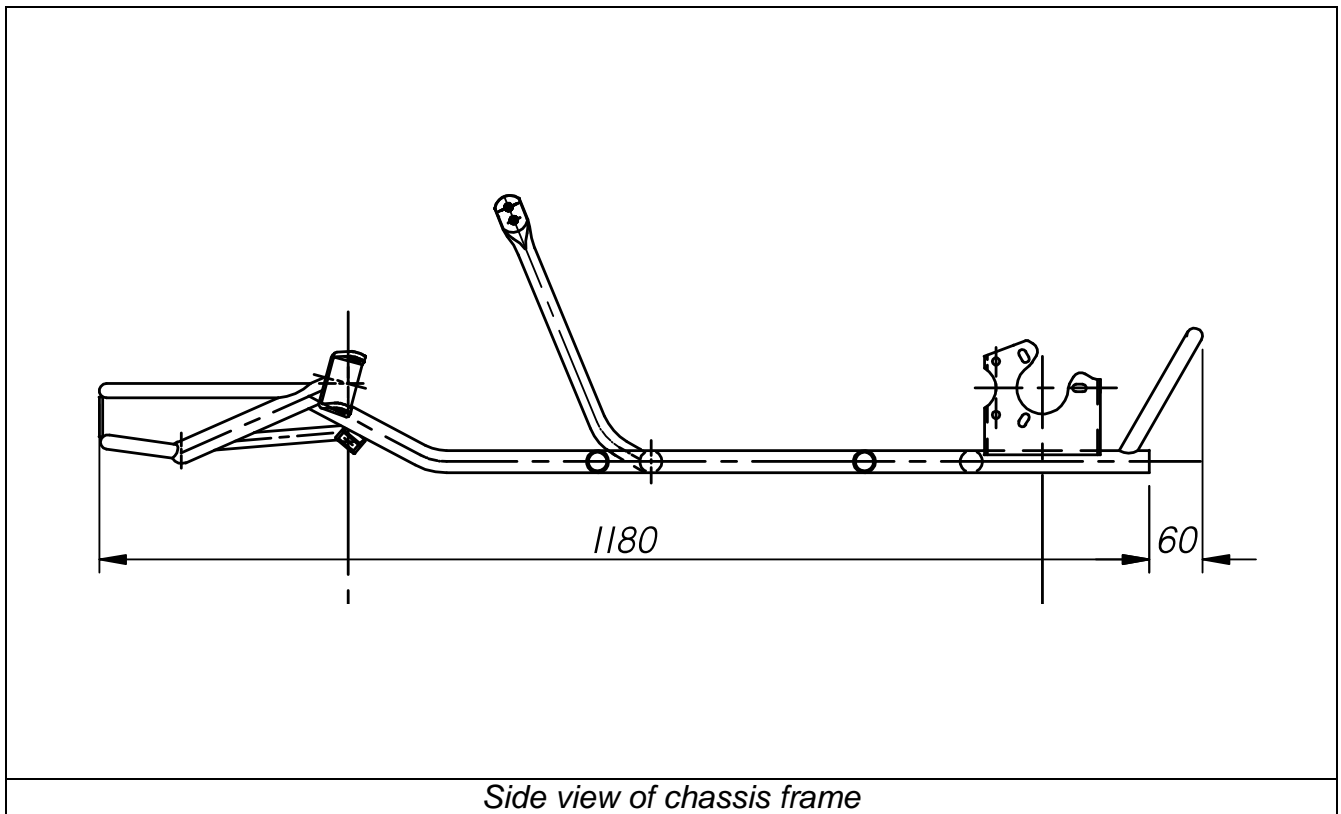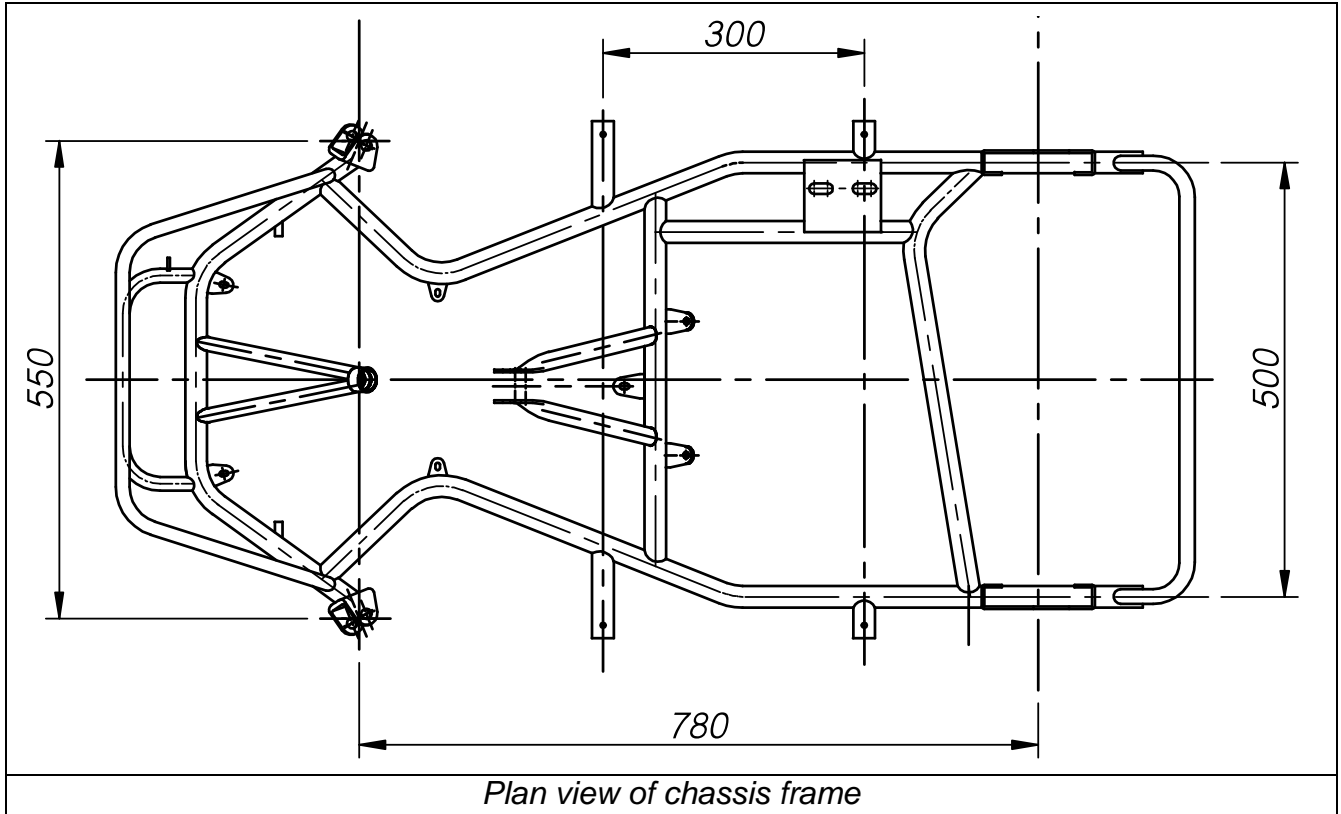

DETAILS OF IDENTITY PLATE



Photograph of I.D. plate

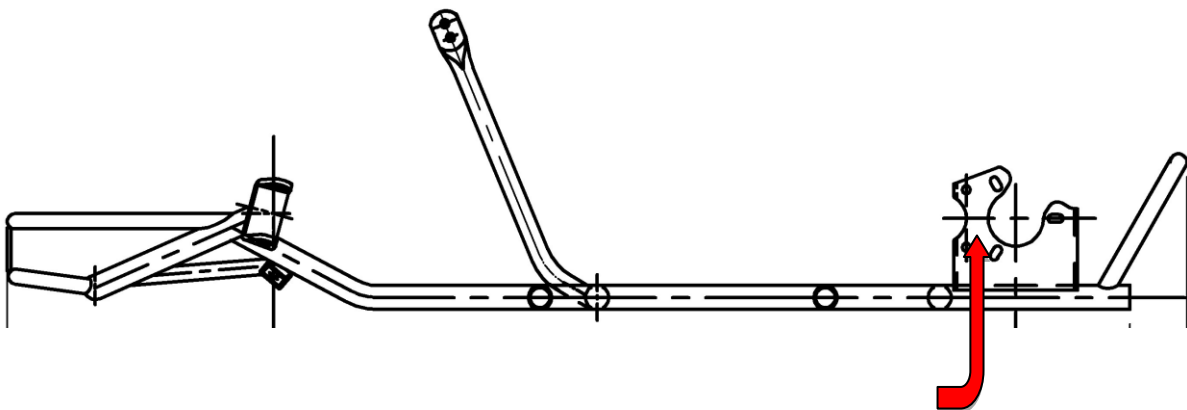

Drawing of position of I.D. plate


DIMENSIONS OF FRAME

		<i>Measurement</i>	<i>Tolerance</i>
A:	Total Length	1235 mm	+/- 10mm
B:	Width at Front Axle	535 mm	+/- 10mm
C:	Width at Rear Axle	505 mm	+/- 10mm
D:	Wheelbase	780 mm	+/- 10mm
E:	Number of Bends	7	-
F:	Number of Tubes with Ø over 21mm	6	(max. 6)
G:	Tube Diameter	25.3 mm	+/- 0.3mm
H:	Tube Wall Thickness	2 mm	+/- 0.2mm
I:	Tube Material	Steel	mandatory
J:	Number of Bearings	2	mandatory
K:	Outside Ø of Axle	25 mm	+/- 0.2mm
L:	Axle Wall Thickness	Solid	+/- 0.2mm

COMPLIMENTARY INFORMATION

BRAKE SYSTEM


<i>Manufacturer</i>	BIREL
<i>Make</i>	Freeline
<i>Model</i>	Mechanical

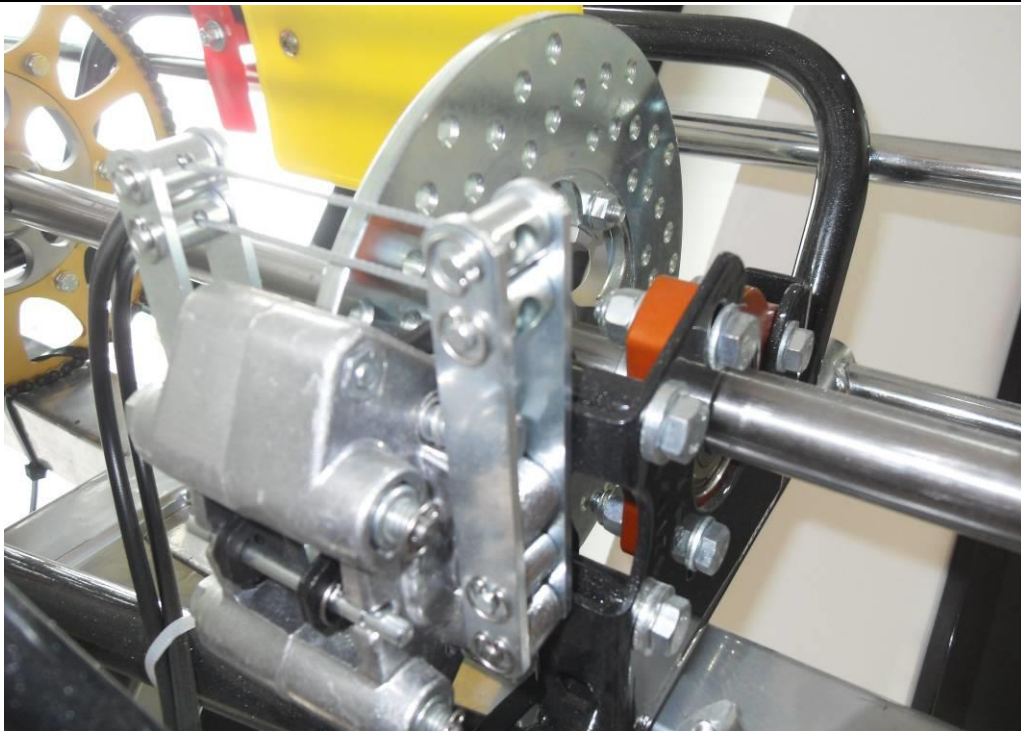

Photograph of complete brake system

TECHNICAL DETAILS

		<i>Measurement</i>	<i>Tolerance</i>
A:	Actuation	Mechanical	-
B:	Number of Calipers	1	-
C:	Caliper Material	Aluminium	-
D:	Number of Pads	2	<i>per Caliper</i>
E:	Thickness of Disc	6 mm	+/- 1mm
F:	External Ø of Disc	200 mm	+/- 1.5mm
G:	Internal Ø of Disc	100 mm (max.)	+/- 1.5mm
H:	Drilled Disc?	Yes	-
I:	Grooved Disc?	No	-
J:	Number of Mounting Lugs	6	-
K:	Dual Linkage?	Yes	mandatory

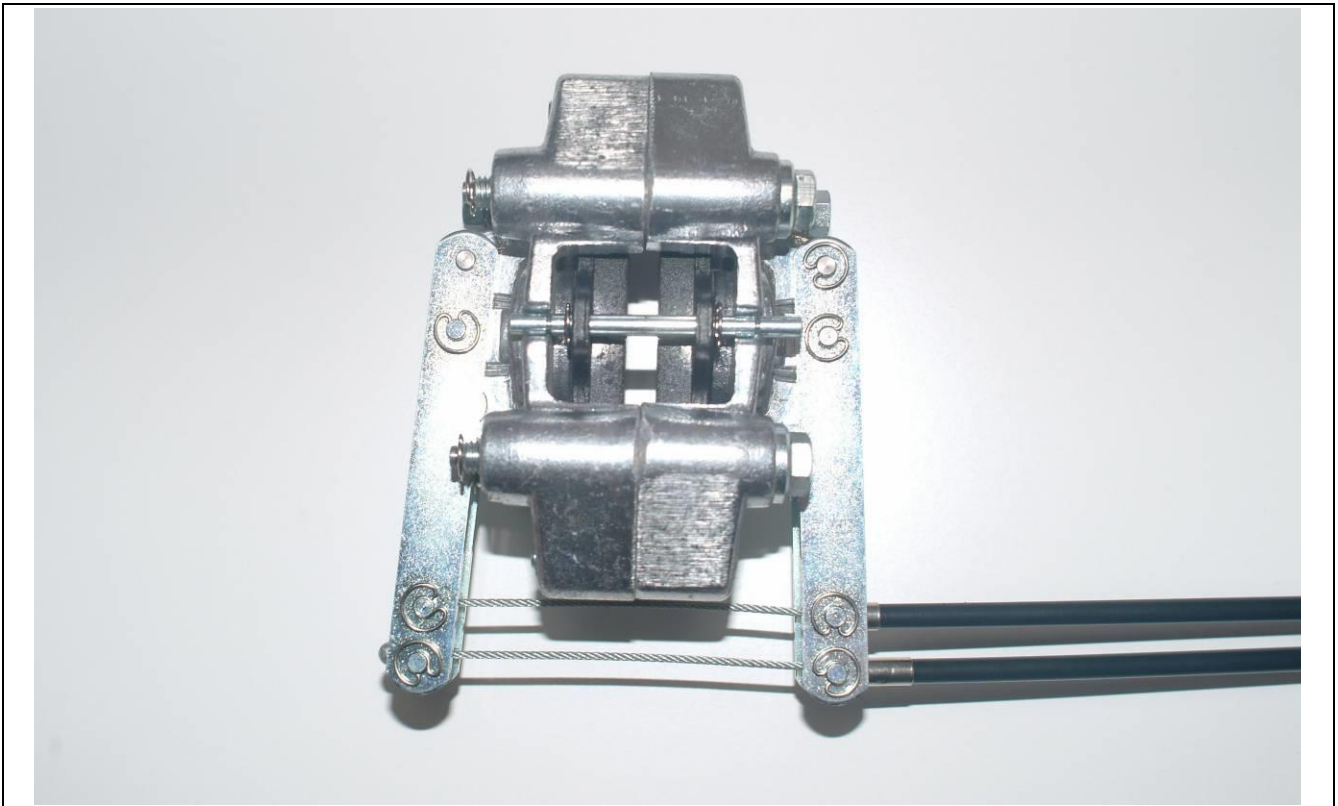

Photograph of brake caliper



Photograph of brake disc

COMPLIMENTARY INFORMATION

Insert any additional information that may be required here